

The Relocatable Outdoor Cube™



Product Benefits


- ROC offers the same look and benefits of traditional storage
- In rental environments the ROC is able to quickly generate additional income with minimal investment
- Easily relocatable with a 5000 lb. forklift with extended forks
- Features easy-to-operate roll up doors that require virtually no maintenance
- Secure and convenient
- Easy to expand to accommodate growth
- Adaptable to odd-sized lots or slightly sloping land / driveways
- Classified as Equipment, standard building permits may not be required (check local ordinances)
- Are often permitted where containers are restricted due to design and aesthetics



STORAGE BOX SOLUTIONS^{INC.}

www.storageboxsolutions.ca | sales@storageboxsolutions.ca | 403-875-6200

The Relocatable Outdoor Cube™

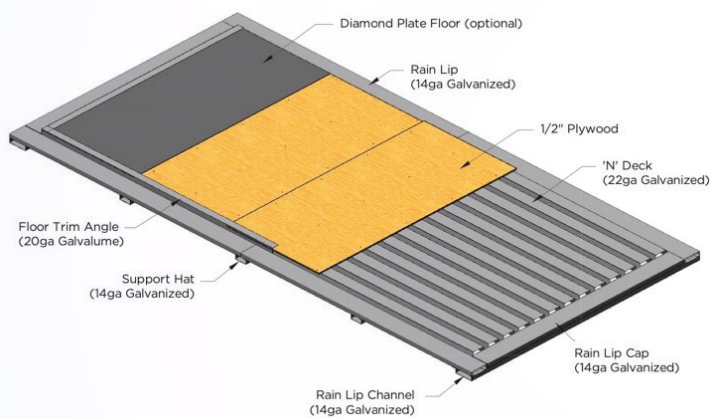

Additional Features and Options

- 125 pound per square foot floor load
- Designed with special features to reduce moisture
- Can be anchored to asphalt, and wired for electricity
- Doors available in 36 colours
- Rain lip and elevated floor reduce moisture
- Vertical standard seam with drip stop condensation barrier factory applied to bottom of roofing panel
- Insulated roofs prevent condensation and regulate the heat as well as the cold
- Skid panel outside the doors offer a non-slip entry
- Units are built close to the ground for easy access

Quality Built, Strong & Durable

- Sturdy construction featuring all galvanized steel framing
- Continuous 22-gauge galvanized 'N' deck base with 1/2" plywood flooring (optional diamond plate)
- Standard 26 gauge steel doors
- Standard 25 gauge roofing system
- Galvanized steel is much more durable than PVC
- Standard 30 lb per sq/ft snow load (optional to 50 lb per sq/ft)

Available Sizes

- Standard 10' platform depth with widths from 10' to 30' in 5' increments (customizable in 1' increments)
- Can be subdivided into any unit size combo of 5' x 5' to 10' x 30'



STORAGE BOX SOLUTIONS INC.

www.storageboxsolutions.ca | sales@storageboxsolutions.ca | 403-875-6200